



Dimensions

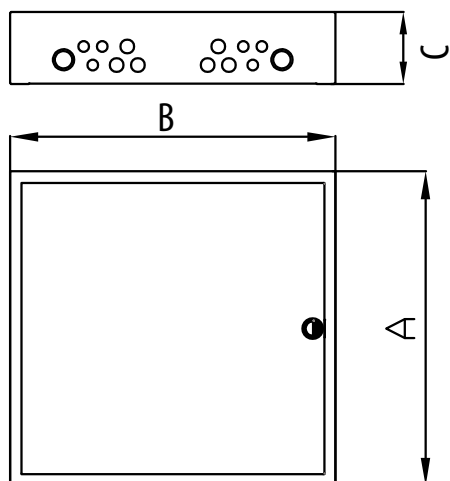

Dimensions

Type	Dimensions			Max. allowed power losses when Max. number of devices are installed Pde
	A [mm]	B [mm]	C [mm]	
MBW24-2	466	613	130	68
MBW24-3	591	613	130	98
MBW24-4	716	613	130	113
MBW24-5	841	613	130	173
MBW24-6	966	613	130	183
MBW24-7	1091	613	130	188
MBW24-8	1216	613	130	218
MBW18-1	300	450	130	43
MBW18-2	425	450	130	63
MBW18-3	550	450	130	68
MBW18-4	675	450	130	83
MBW18-5	800	450	130	108
MBW18-6	925	450	130	133
MBW18-7	1050	450	130	143
MBW18-8	1175	450	130	158

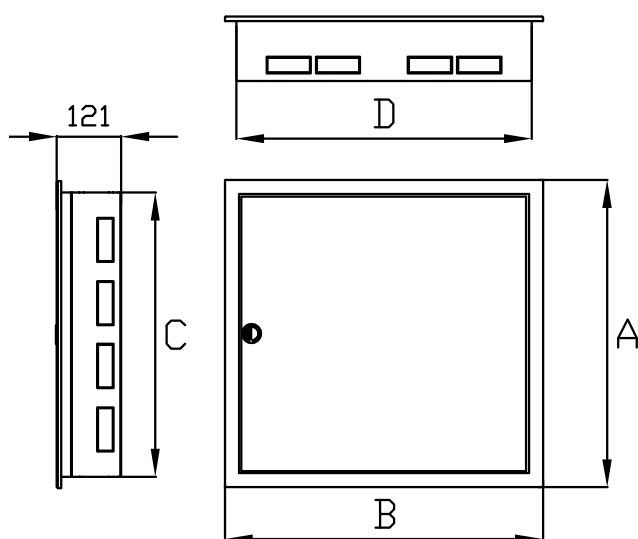

Dimensions

Type	Dimensions				Max. allowed power losses when Max. number of devices are installed Pde
	A [mm]	B [mm]	C [mm]	D [mm]	
MBF24-2	502	649	442	590	58
MBF24-3	627	649	567	590	78
MBF24-4	752	649	692	590	108
MBF24-5	877	649	817	590	158
MBF24-6	1002	649	942	590	168
MBF24-7	1127	649	1067	590	188
MBF24-8	1252	649	1192	590	203
MBF18-1	336	486	278	428	38
MBF18-2	461	486	403	428	58
MBF18-3	586	486	528	428	63
MBF18-4	711	486	653	428	68
MBF18-5	836	486	778	428	98
MBF18-6	961	486	903	428	118
MBF18-7	1086	486	1028	428	128
MBF18-8	1211	486	1153	428	143